






Tecnau presents its High Performance Cutter TC 1000 T
SIMPLA T
It has been developed to link Digital Printers and to work "stand-alone"

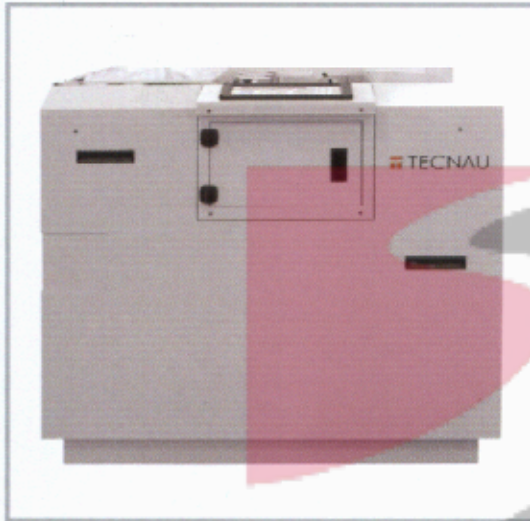

The **SIMPLA T** main features include:





- unique cartridge design: the cross blade cartridges and the side trimming cartridges are removable and interchangeable for quick and easy on site maintenance and for quick application changeover
- oscillating cross blade cartridge with high precision (1/96") and high durability
- vertical cross blade cartridge (3 blades system) for single stroke 1/6" strip cut
- vertical cross blade cartridge (3 blades system) for single stroke 7,8 mm. strip cut
- high speed, up to 36.000 cuts for hour (12" height form)
- paper loop interface for direct connection to laser printers
- base on wheels with blocking device
- up to 99 cutting program memory
- display and keyboard for programming, information and service

APPLICATIONS

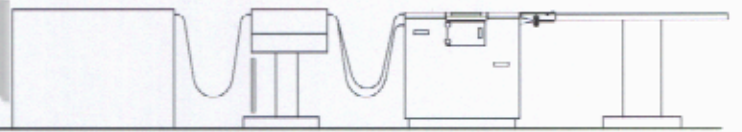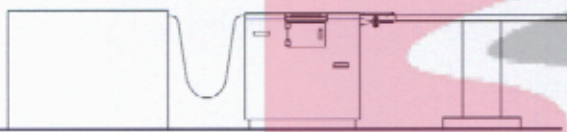




PRINTER **CUTTER** TC CONVEYOR
 TC 1012T 1007T TC 0250

PRINTER **MERGER** **CUTTER** TC CONVEYOR
 COMBO **TC 1012T** 1007T TC 0250
 TC 1105

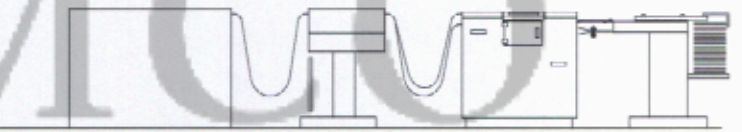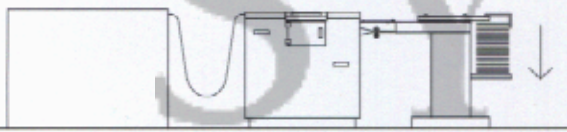

PRINTER **CUTTER** TC STACKER
 TC 1012T 1007T TC 1200

PRINTER **MERGER** **CUTTER** TC STACKER
 COMBO **TC 1012T** 1007T TC 1200
 TC 1105

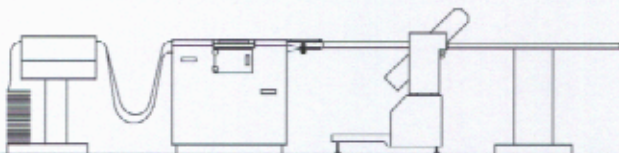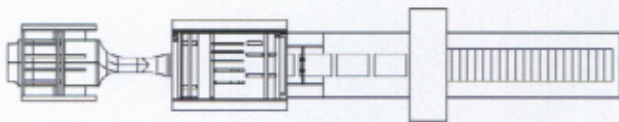


MERGER **CUTTER** TC **FOLDER** **CONVEYOR**
COMBO **TC 1012T** 1007T **TC 0250**
TC 1105


PRINTER **CUTTER** TC CONVEYOR
 TC 1013T 1007T TC 0250

SYMCO GROUP

CARTRIDGES

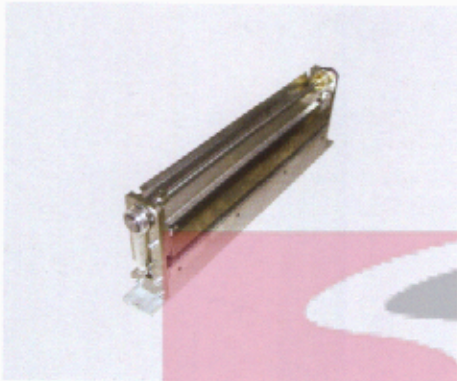


OSCILLATING BLADE CARTRIDGE
TC 1010 T/W

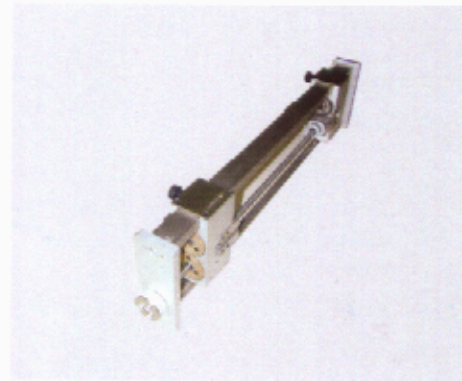

SIDE TRIMMING CARTRIDGE
TC 1002 T



VERTICAL BLADE CARTRIDGE
TC 1020 T/W (strip cut 1/6")

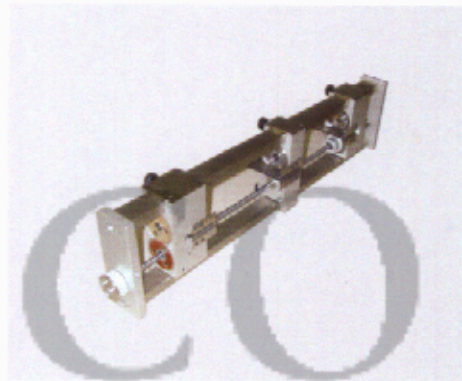

SIDE TRIMMING &
CENTRAL KNIFE CARTRIDGE
TC 1003 T



VERTICAL BLADE CARTRIDGE
TC 1030 T/W (strip cut 7.8 mm)

Distributed in the USA by:



Paper Handling, Processing & Finishing Equipment

12 Inspiration Lane
Chester, CT 06412
Phone: 800-833-6167
E-Mail: salcs@gb.com

Fax: 860-526-2747
Website: <http://www.gbr.com>

TECHNICAL SPECIFICATIONS

PAPER SPECIFICATION

- paper weight : Min. 70 g/ms - Max. 130 g/ms
- width form: Max. 20"
- height form: Min. 2" 5/6 Max. 99"
- cut strip paper: programmable with oscillating blade cartridge TC 1010, 1/6" with vertical blade cartridge TC 1020, 7,8 mm. with vertical blade cartridge TC 1030
- side trimming: up to 25 mm. for side
- paper speed: 99 positions

SIZE AND WEIGHT

- width: 1060 mm.
- length: 1060 mm.
- height: 1100 mm.
- weight: 290 Kg.

POWER REQUIREMENT

- 230V/110V - 50/60 Hz.
- 1.5 KVA

SPEED (cuts for hour)

CARTRIDGE	TC 1010 T/W	TC 1020 T/W	TC 1030 T/W
Cut	Single Cut	Strip Cut Single Cut	Strip Cut Single Cut
Height Form 4"	60.000	60.000	60.000
Height Form 8"	45.000	45.000	45.000
Height Form 12"	36.000	36.000	36.000

SIMPLA CONFIGURATIONS

SIMPLA T	TC 1010 T/W	TC 1020 T/W	TC 1030 T/W	TC 1002 T/W	TC 1003 T/W
TC 1012 T	X			X	
TC 1013 T	X				X
TC 1022 T		X		X	
TC 1023 T		X			X
TC 1032 T			X	X	
TC 1033 T			X		X