

Tecnau presents its High Performance Cutter TC 1000F - FAST SIMPLA FAST

It has been developed to link Digital Printers and to work "stand-alone".





The SIMPLA FAST main features include:


- Unique cartridge design: the cross blade cartridges and the side trimming cartridges are removable and interchangeable for quick and easy on site maintenance and for quick application changeover
- Oscillating cross blade cartridge with high precision (1 /96") and high durability
- Vertical cross blade cartridge (3 blade system) for single stroke 1 /6" strip cut
- Vertical cross blade cartridge (3 blade system) for single stroke 0.31" strip cut
- High speed, up to 25,000 cuts per hour (12" height form)
- Paper loop interface for direct connection to laser printers
- Base on wheels with blocking device
- Height adjustment paper level device
- Up to 99 cutting program memory
- Display and keyboard for programming, information, service

Distributed in the United States by GBR Systems Corporation
800-833-6167 / 860-526-9561 / Fax: 860-526-2747
Internet: www.gbr.com / e-mail: sales@gbr.com
Managing the World's Paper Flow™

GBR Systems Corporation is a subsidiary of Mathias Bauerle GmbH



APPLICATIONS

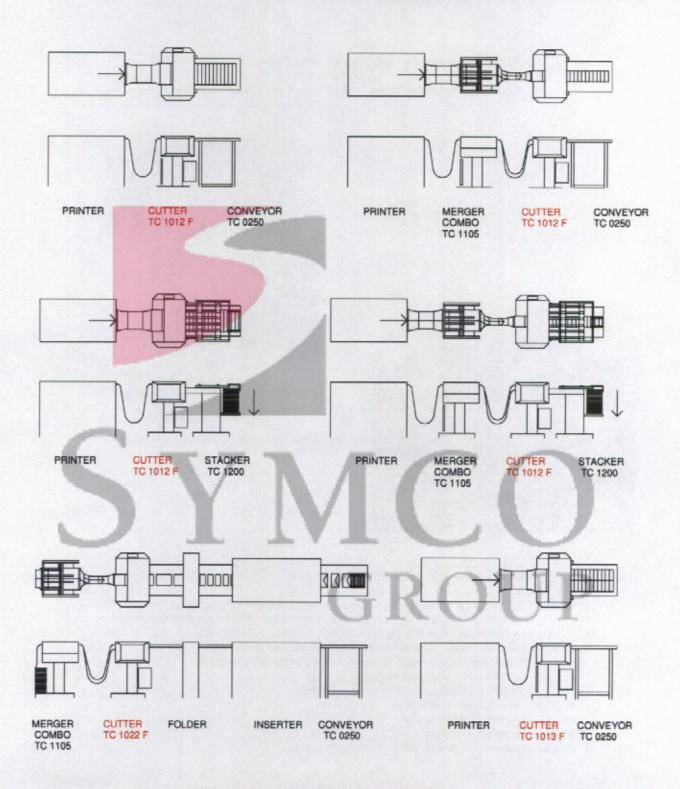

CARTRIDGES




OSCILLATING BLADE CARTRIDGE TC 1010



SIDE TRIMMING CARTRIDGE TC 1002



VERTICAL BLADE CARTRIDGE TC 1020 (strip cut 1/6")



SIDE TRIMMING & CENTRAL KNIFE CARTRIDGE TC 1003



VERTICAL BLADE CARTRIDGE TC 1030 (strip cut 0.13")

GROUP

TECHNICAL SPECIFICATIONS

PAPER SPECIFICATION

paper weight: Min. 16 lb. Max.67 lb. multicopy form: form width: Max.weight 150 lbs.

Max.20"

form height: Min.2-5/6", Max. 99"

cut strip paper: Programmable with oscillating blade cartridge - TC 1010

1/6" with vertical blade cartridge - TC 1020 0.31" with vertical blade cartridge - TC 1030

side trimming: up to 1.0" paper speed: 99 positions

height paper output level: from 38.2" to 47.6" - TC 1005 option

SIZE AND WEIGHT

 length 25.6" width 33.1"

height 43.3" (min. 41.5", max. 51" - TC 1005 option)

 weight 352 lbs.

POWER REQUIREMENT

230V/110V - 50/60 Hz

1.5 KVA

SPEED (cuts per hour)

CARTRIDGE Cut Selected		TC 1010	TC 1020	TC 1030 0.31" Strip Cut	
		Single Cut	1/6" Strip Cut		
Height Form	4"	40,000	40,000	40,000	
Height Form	8"	30,000	30,000	30,000	
Height Form	12"	25,000	25,000	25,000	

SIMPLA CONFIGURATIONS

SIMPLA	TC 1010	TC 1020	TC 1030	TC 1002	TC 1003
TC 1012 F	X			X	
TC 1013 F	X			10000000000000000000000000000000000000	X
TC 1022 F		X		X	
TC 1023 F		X			X
TC 1032 F			X	X	
TC 1033 F			X		X

