


Tecnau presents its High Performance Cutter TC 7000 A  
**PINLESS SIMPLA A**  
It has been developed to link Digital Printers and to work "stand-alone".

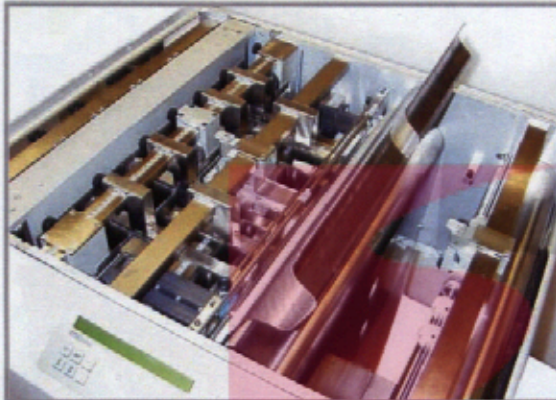

The **PINLESS SIMPLA A** main features include:

- Unique cartridge design: the cross blade cartridges and the side trimming cartridges are removable and interchangeable for quick and easy on-site maintenance and for quick application changeover.
- Oscillating cross blade cartridge with high precision (1/96") and high durability.
- Vertical cross blade cartridge (3 blade system) for single stroke 1/6" strip cut.
- Vertical cross blade cartridge (3 blade system) for single stroke 0.31" strip cut.
- High speed, up to 20,000 cuts per hour (12" height form).
- Parallel and serial interfaces.
- Paper loop interface for direct connection to laser printers.
- Height adjustment device of the paper level.
- Base on wheels with blocking device.
- Up to 99 cutting program memory.

*Distributed in the United States by GBR Systems Corporation*




800-833-6187 / 860-526-9561 / Fax: 860-526-2747

Internet: [www.gbr.com](http://www.gbr.com) / e-mail: [sales@gbr.com](mailto:sales@gbr.com)

Managing the World's Paper Flow™



GBR Systems Corporation is a subsidiary of Mathias Bauerle GmbH

# APPLICATIONS

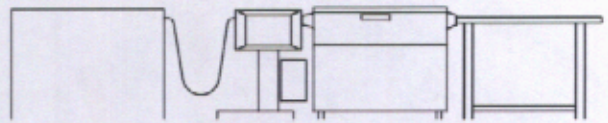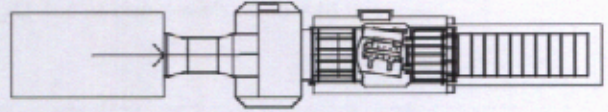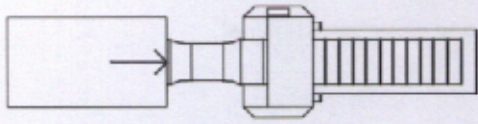





PRINTER  
**CUTTER TC 7012 A**  
 CONVEYOR TC 0250

PRINTER  
**CUTTER TC 7013 A**  
 DLS 101  
 CONVEYOR TC 0250 A

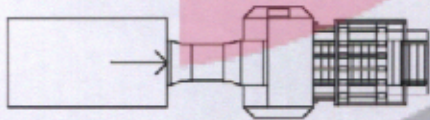

PRINTER  
**CUTTER TC 7012 A**  
 STACKER TC 1200

PRINTER  
**CUTTER TC 7013 A**  
 DLS 101  
 TC 1250 G  
 TC 0310 G

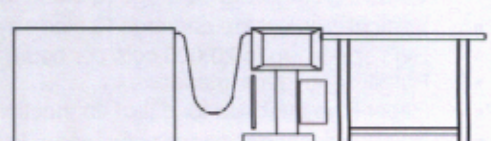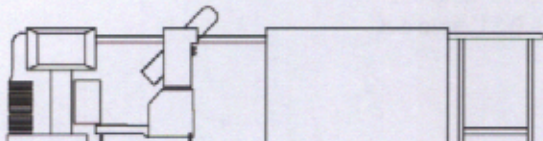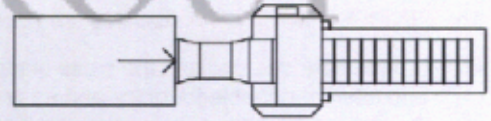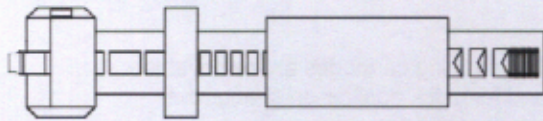


**CUTTER TC 7022 A**  
 FOLDER  
 INSERTER  
 CONVEYOR TC 0250

PRINTER  
**CUTTER TC 7013 A**  
 CONVEYOR TC 0250

SYMCO GROUP

CARTRIDGES

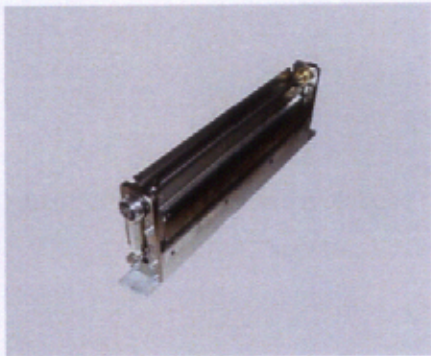


OSCILLATING BLADE CARTRIDGE  
TC 1010



SIDE TRIMMING CARTRIDGE  
TC 1002



VERTICAL BLADE CARTRIDGE  
TC 1020 (strip cut 1/6")

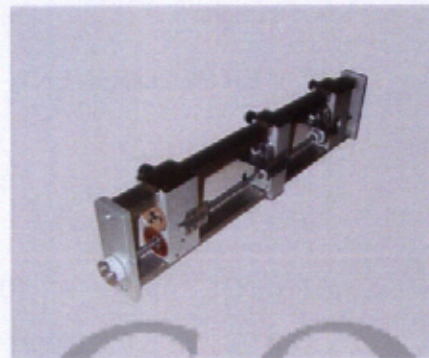

SIDE TRIMMING &  
CENTRAL KNIFE CARTRIDGE  
TC 1003



VERTICAL BLADE CARTRIDGE  
TC 1030 (strip cut 0.13")

SYMCO  
GROUP

## TECHNICAL SPECIFICATIONS

### PAPER SPECIFICATION

- Paper weight: Min. 16 lb. Max. 67 lb.
- Form width: Max. 20"
- Form height: Min. 2.84", Max. 24"
- Cut strip paper: Programmable with oscillating blade cartridge TC 1010, 1/6" with vertical blade cartridge TC 1020, 0.31" with vertical blade cartridge TC 1030
- Side trimming: up to 1.0"
- Height paper level: from 38.2" to 47.6"
- Paper speed: 99 positions

### SIZE AND WEIGHT

- Length: 29.5"
- Width: 35.0"
- Height: min. 41.75", max. 51.2"
- Weight: 506 lbs.

### POWER REQUIREMENT

- 230V/110V - 50/60 Hz
- 1.5 KVA

### SPEED (cuts per hour)

CARTRIDGE		TC 1010	TC 1020	TC 1030
Cut		Single Cut	Strip Cut Single Cut	Strip Cut Single Cut
Height Form	4"	32,000	32,000	32,000
Height Form	8"	24,000	24,000	24,000
Height Form	12"	20,000	20,000	20,000

### SIMPLA CONFIGURATIONS

SIMPLAA	TC 1010	TC 1020	TC 1030	TC 1002	TC 1003
TC 7012 A	X			X	
TC 7013 A	X				X
TC 7022 A		X		X	
TC 7023 A		X			X
TC 7032 A			X	X	
TC 7033 A			X		X

**Distributed in the United States by GBR Systems Corporation**

800-833-6167 / 860-526-9561 / Fax: 860-526-2747

Internet: [www.gbr.com](http://www.gbr.com) / e-mail: [sales@gbr.com](mailto:sales@gbr.com)

Managing the World's Paper Flow™

GBR Systems Corporation is a subsidiary of Mathias Bauerle GmbH

